

**EX-10** SERIES Ver.2

## Related Information

■ General terms and conditions..... F-7

■ Sensor selection guide..... P.271~

■ Glossary of terms / General precautions .....P.1455~ / P.1458~

■ Korea's S-mark..... P.1506


[panasonic.net/id/pidsx/global](http://panasonic.net/id/pidsx/global)
**Amplifier built-in extraordinarily small and slim size****Smallest body, just 3.5 mm 0.138 in thick**

It can be mounted in a very small space as its size is just W10 × H14.5 × D3.5 mm  
**W0.394 × H0.571 × D0.138 in**  
 (thru-beam, front sensing type).

**Flexible mounting**


The diffuse reflective type sensor is front sensing and is so thin that it gives an impression of being just pasted on the mounting base. The thru-beam type is available as front sensing type, as well as, side sensing type, allowing flexible mounting.

- Thru-beam  
 • Front sensing type  
 • Side sensing type
- Diffuse reflective  
 • Front sensing type

**A wide variety of narrow-beam type! Light diffusion is approx. 1/2 of standard type.****EX-□S□**


**Less interference with no slit, narrow-pitch can be set.**

The pitch of installation is 1/2 of conventional models, so that the close-installation is possible. No cost is necessary to purchase or install a slit.

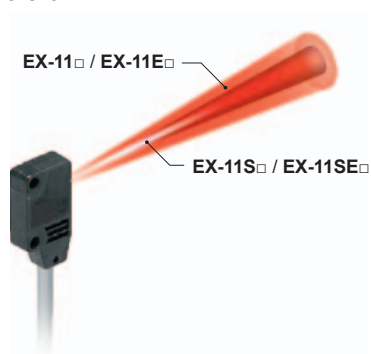


**Possible to sense a minute object less than ø0.5 mm ø0.039 in with no slit.**

The series is applicable to sense a minute object without any cost.

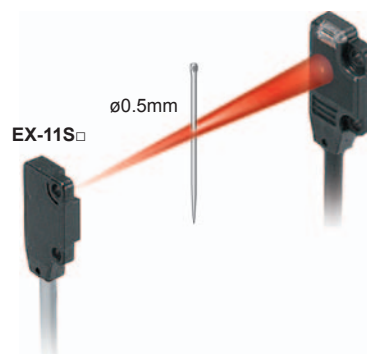

**Long sensing range of 1 m 3.281 ft with narrow beam**

A long 1 m 3.281 ft sensing range is possible with narrow beam.

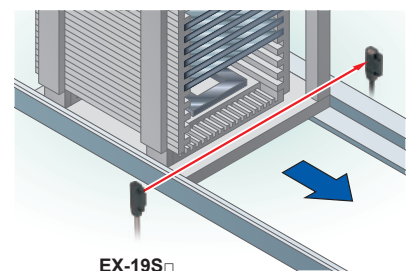

CX-400

CY-100

**EX-10**

EX-20

EX-30

EX-40

CX-440

EQ-30







EQ-500

MQ-W

RX-LS200


RX

RT-610

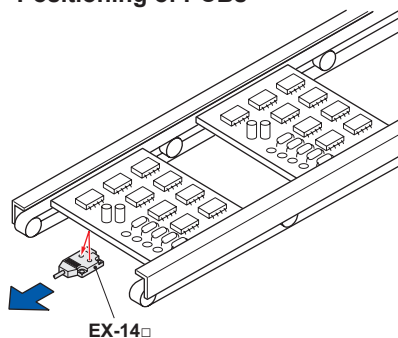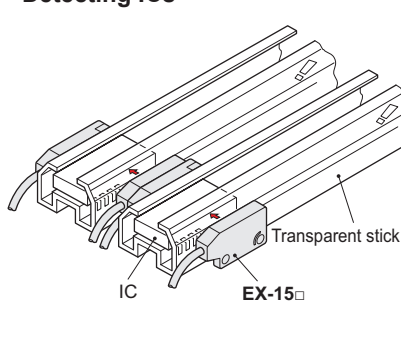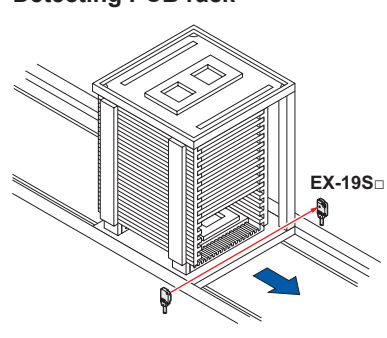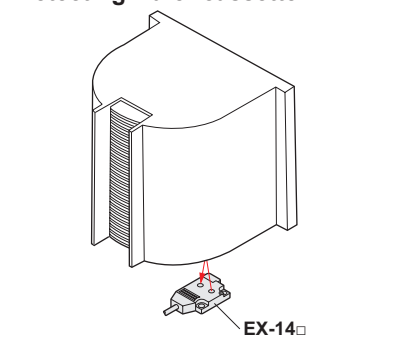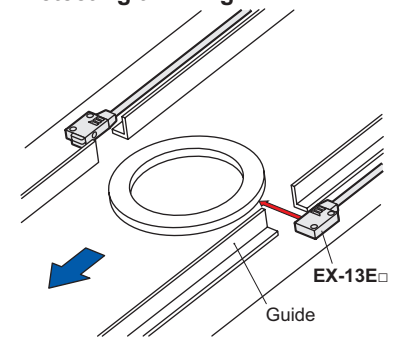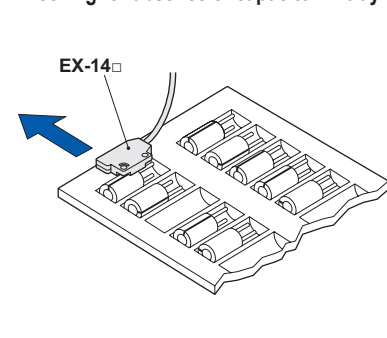
**APPLICATIONS****Positioning of PCBs****Detecting ICs****Detecting PCB rack****Detecting wafer cassette****Detecting thin ring****Checking for absence of capacitor in tray****BASIC PERFORMANCE****Electric power saving \***

The EX-10 series achieves reductions in power consumption of up to 65 %. These sensors contribute to environmental friendliness.


\* Effective from production in October 2010.

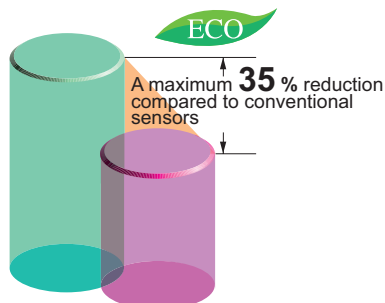**High-speed response time: 0.5 ms**


The sensor is suitable for detecting small and high-speed traveling objects.

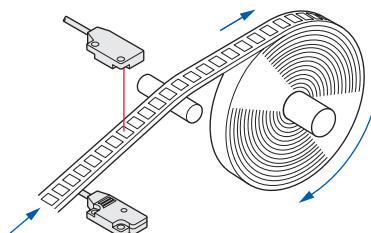**Minimum sensing object:  $\phi 1$  mm  $\phi 0.039$  in EX-11(E)□, EX-15(E)□**


EX-11□, EX-11E□, EX-15 and EX-15E are incorporated with  $\phi 1$  mm  $\phi 0.039$  in slit masks so that  $\phi 1$  mm  $\phi 0.039$  in, or more, object can be detected. Hence, they are suitable for precise positioning or small parts detection.

**Long sensing range: 1 m 3.281 ft EX-19(E)□**


A sensing range of 1 m 3.281 ft has been realized with a slim size of just 3.5 mm 0.138 in. It can be used to detect even wide IC trays.

**Background suppression****Hardly affected by background**

Even a specular background separated by 100 mm 3.937 in, or more, is not detected. (However, the background should be directly opposite. A spherical or curved background may be detected.)

**Black object reliably detected**

It can reliably detect dark color objects since it is convergent reflective type.



FIBER SENSORS

LASER SENSORS

PHOTOELECTRIC SENSORS

MICRO PHOTOELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASUREMENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Power Supply Built-in

Amplifier-separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200

RX

RT-610

FIBER  
SENSORSLASER  
SENSORSPHOTOELECTRIC  
SENSORSMICRO  
PHOTOELECTRIC  
SENSORSAREA  
SENSORSLIGHT CURTAINS /  
SAFETY  
COMPONENTSPRESSURE /  
FLOW  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE SENSORSSENSOR  
OPTIONSSIMPLE  
WIRE-SAVING  
UNITSWIRE-SAVING  
SYSTEMSMEASUREMENT  
SENSORSSTATIC ELECTRICITY  
PREVENTION  
DEVICESLASER  
MARKERS

PLC

HUMAN MACHINE  
INTERFACESENERGY CONSUMPTION  
VISUALIZATION  
COMPONENTS

FA COMPONENTS

MACHINE VISION  
SYSTEMSUV CURING  
SYSTEMSSelection  
GuideAmplifier  
Built-inPower Supply  
Built-inAmplifier-  
separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200


RX

RT-610

**ENVIRONMENTAL RESISTANCE****Incorporated an inverter countermeasure circuit \***

The **EX-10** series become significantly stronger against inverter light and other extraneous light.

\* Effective from production in October 2010.

**Waterproof IP67**

The sensor can be hosed down because of its IP67 construction and the non-corrosive stainless steel mounting bracket.

Note: However, take care that if it is exposed to water splashes during operation, it may detect a water drop itself.

**Bending durability****EX-□-R**


Flexible cable type **EX-□-R** is available. It is most suitable for moving parts, such as robot arm, etc.

**MOUNTING / SIZE****Mountable with M3 screws**

Non-corrosive stainless steel type sensor mounting bracket is also available.


- **MS-EX10-1**  
[Cold rolled carbon steel (SPCC)]

**MS-EX10-11**  
[Stainless steel (SUS304)]  
(mounting bracket for the front sensing type)




- **MS-EX10-2**  
[Cold rolled carbon steel (SPCC)]

**MS-EX10-12**  
[Stainless steel (SUS304)]  
(mounting bracket for the side sensing type)



- **MS-EX10-3**  
[Cold rolled carbon steel (SPCC)]

**MS-EX10-13**  
[Stainless steel (SUS304)]  
(L-shaped mounting bracket)




Note: Sensor mounting brackets can not be used for the narrow beam type (**EX-□S□**).

**Red beam makes beam alignment easy**

The red LED beam projected from the emitter helps you to align the sensor heads.

**FUNCTIONS****Bright 2-color indicator**


A convenient 2-color indicator has been incorporated in the miniature body.



2-color indicator  
(Orange: Operation indicator  
Green: Stability indicator)

**VARIETIES****Operation mode switch****EX-15□/17□**

Thru-beam type sensor incorporated with an operation mode switch on the bifurcation is also available. It helps you to test the operability before start-up.



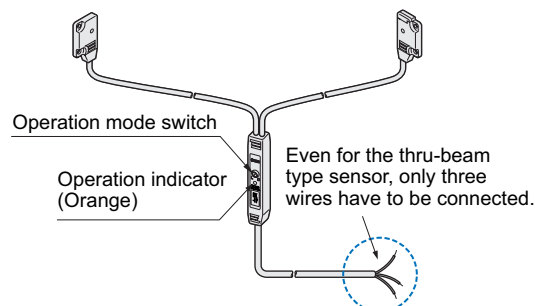

















**OTHERS****Less resources used \***

Based on environmental considerations, simplified packaging is used in order to reduce waste. In addition, the bag is made from polyethylene which produces no toxic gases even when burned.

\* Effective from production in October 2010.



**ORDER GUIDE**

Type		Appearance	Sensing range	Model No.(Note 2)		Output operation	Output			
				NPN output	PNP output					
Standard Type	Thru-beam	Front sensing <div>With operation mode switch on the bifurcation</div>		 150 mm <span>5.906 in</span>	EX-11A	EX-11A-PN	Light-ON	NPN open-collector transistor or PNP open-collector transistor		
					EX-11B	EX-11B-PN	Dark-ON			
			 500 mm <span>19.685 in</span>	EX-13A	EX-13A-PN	Light-ON				
				EX-13B	EX-13B-PN	Dark-ON				
				 1 m <span>3.281 ft</span>	EX-19A	EX-19A-PN	Light-ON			
					EX-19B	EX-19B-PN	Dark-ON			
		Side sensing <div>With operation mode switch on the bifurcation</div>		 150 mm <span>5.906 in</span>	EX-15	EX-15 -PN	Switchable either Light-ON or Dark-ON			
					EX-17	EX-17-PN				
				 500 mm <span>19.685 in</span>						
					Convergent reflective (Diffused beam type)	Front sensing			 2 to 25 mm <span>0.079 to 0.984 in</span> (Note 1) (Convergent point: 10 mm <span>0.394 in</span> )	EX-14A
	EX-14B	EX-14B-PN	Dark-ON							
	Side sensing		 150 mm <span>5.906 in</span>	EX-11EA		EX-11EA-PN		Light-ON		
				EX-11EB		EX-11EB-PN		Dark-ON		
				 500 mm <span>19.685 in</span>		EX-13EA		EX-13EA-PN	Light-ON	
						EX-13EB		EX-13EB-PN	Dark-ON	
				 1 m <span>3.281 ft</span>		EX-19EA		EX-19EA-PN	Light-ON	
						EX-19EB		EX-19EB-PN	Dark-ON	
				Narrow beam type		Thru-beam		Front sensing		 150 mm <span>5.906 in</span>
	EX-11SB	EX-11SB-PN	Dark-ON							
 500 mm <span>19.685 in</span>	EX-13SA	EX-13SA-PN	Light-ON							
	EX-13SB	EX-13SB-PN	Dark-ON							
	 1 m <span>3.281 ft</span>	EX-19SA	EX-19SA-PN		Light-ON					
		EX-19SB	EX-19SB-PN		Dark-ON					
Side sensing		 150 mm <span>5.906 in</span>	EX-11SEA		EX-11SEA-PN	Light-ON				
			EX-11SEB		EX-11SEB-PN	Dark-ON				
			 500 mm <span>19.685 in</span>		EX-13SEA	EX-13SEA-PN	Light-ON			
					EX-13SEB	EX-13SEB-PN	Dark-ON			

**NOTE:** Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (MS-EX10-□). Sensor mounting brackets (MS-EX10-□) can not be used for the narrow beam type (EX-□S□).

Notes: 1) The sensor does not detect even a specular background if it is separated by 100 mm 3.937 in or more. (However, the background should be directly opposite. A spherical or curved background may be detected.)

2) The model No. with "P" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.

**Flexible cable type**

Flexible cable type is also available for NPN output type. (excluding narrow beam type EX-□S□ and sensor with operation mode switch on the bifurcation EX-15□/17□)

When ordering this type, suffix "-R" to the model No.

(e.g.) Flexible cable type of EX-11A is "EX-11A-R".

**5 m 16.404 ft cable length type**

5 m 16.404 ft cable length type (standard: 2 m 6.562 ft) is also available for NPN output type. (excluding narrow beam type EX-□S□ and flexible cable type)

When ordering this type, suffix "-C5" to the model No.

(e.g.) 5 m 16.404 ft cable length type of EX-11A is "EX-11A-C5".

FIBER SENSORS

LASER SENSORS

PHOTO-ELECTRIC SENSORS

MICRO PHOTO-ELECTRIC SENSORS

AREA SENSORS

LIGHT CURTAINS / SAFETY COMPONENTS

PRESSURE / FLOW SENSORS

INDUCTIVE PROXIMITY SENSORS

PARTICULAR USE SENSORS

SENSOR OPTIONS

SIMPLE WIRE-SAVING UNITS

WIRE-SAVING SYSTEMS

MEASURE-MENT SENSORS

STATIC ELECTRICITY PREVENTION DEVICES

LASER MARKERS

PLC

HUMAN MACHINE INTERFACES

ENERGY CONSUMPTION VISUALIZATION COMPONENTS

FA COMPONENTS

MACHINE VISION SYSTEMS

UV CURING SYSTEMS

Selection Guide

Amplifier Built-in

Power Supply Built-in

Amplifier-separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200

RX

RT-610

## SPECIFICATIONS

Type			Thru-beam · standard type					
			Front sensing	Side sensing	Front sensing	Side sensing	Front sensing	Side sensing
Item	Model No. (Note 2)	Light-ON	EX-11A(-PN)	EX-11EA(-PN)	EX-13A(-PN)	EX-13EA(-PN)	EX-19A(-PN)	EX-19EA(-PN)
		Dark-ON	EX-11B(-PN)	EX-11EB(-PN)	EX-13B(-PN)	EX-13EB(-PN)	EX-19B(-PN)	EX-19EB(-PN)
Sensing range			150 mm 5.906 in		500 mm 19.685 in		1 m 3.281 ft	
Min. sensing object			ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 150 mm 5.906 in)		ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 500 mm 19.685 in)		ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 1 m 3.281 ft)	
Hysteresis			—					
Repeatability (perpendicular to sensing axis)			0.05 mm 0.002 in or less					
Supply voltage			12 to 24 V DC ±10 % Ripple P-P 10 % or less					
Current consumption			Emitter: 10 mA or less, Receiver: 10 mA or less					
Output			<NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current)			<PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current)		
			Utilization category			DC-12 or DC-13		
			Short-circuit protection			Incorporated		
Response time			0.5 ms or less					
Operation indicator			Orange LED (lights up when the output is ON)					
Incident beam indicator			—					
Stability indicator			Green LED (lights up under stable light received condition or stable dark condition)					
Environmental resistance	Pollution degree		3 (Industrial environment)					
	Protection		IP67 (IEC)					
	Ambient temperature		-25 to +55 °C -13 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F					
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH					
	Ambient illuminance		Incandescent light: 3,000 lx at the light-receiving face					
	EMC		EN 60947-5-2					
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure					
	Insulation resistance		20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure					
	Vibration resistance		10 to 500 Hz frequency, 3 mm 0.118 in amplitude in X, Y and Z directions for two hours each					
Shock resistance		500 m/s² acceleration (50 G approx.) in X, Y and Z directions for three times each						
Emitting element			Red LED (Peak emission wavelength: 680 nm 0.027 mil (EX-19E□: 624 nm 0.025 mil), modulated)					
Material			Enclosure: Polyethylene terephthalate Lens: Polyallylate					
Cable (Note 5)			0.1 mm² 3-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long					
Cable extension			Extension up to total 50 m 164 ft is possible with 0.3 mm², or more, cable (thru-beam type: emitter and receiver).					
Weight			Net weight (each emitter and receiver): 20 g approx., Gross weight: 50 g approx.					
Accessories			Mounting screws: 1 set					

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.  
2) Model Nos. having the suffix **“-PN”** are PNP output type.  
3) The flexible cable type (model Nos. having suffix **“-R”**) has a 0.1 mm<sup>2</sup> 3-core (thru-beam type emitter: 2-core) flexible cabtyre cable, 2 m **6.562 ft** long.

FIBER  
SENSORS

## LASER SENSORS

## PHOTO-ELECTRIC SENSORS

## PHOTO-ELECTRIC SENSORS

## AREA SENSORS

## CURTAINS / SAFETY COMPONENTS

## INDUCTIVE

## SENSORS

---

### PARTICULAR USE

## SENSOR OPTIONS

## SIMPLE WIRE-SAVING UNITS

## WIRE-SAVING SYSTEMS

## MEASURE- MENT SENSORS

## PREVENTION DEVICES

---

FLC

MACHINE  
INTERFACES

---

ENERGY

## VISUALIZATION COMPONENTS

---

MACHINE  
VISION

UV  
CURING  
SYSTEMS

Amplifier Built-in

Built-in

---

Amplifier-separated

---

**CX-400**

EX-10

EX-30

EX-40

---

CX-440

EQ-30  
EQ-500MQ-W  
RX-LS200RX  
RT-610



## SPECIFICATIONS

Type			Thru-beam · narrow beam type					Convergent reflective (Diffused beam type)	Thru-beam · with operation mode switch on bifurcation					
			Front sensing	Side sensing	Front sensing	Side sensing	Front sensing	Front sensing	Front sensing	Side sensing	Front sensing	Side sensing		
Item	Model No. (Note 2)	Light-ON	EX-11SA(-PN)	EX-11SEA(-PN)	EX-13SA(-PN)	EX-13SEA(-PN)	EX-19SA(-PN)	EX-14A(-PN)	EX-15 (Note 3)	EX-15E (Note 3)	EX-17 (Note 3)	EX-17E (Note 3)		
	Dark-ON	EX-11SB(-PN)	EX-11SEB(-PN)	EX-13SB(-PN)	EX-13SEB(-PN)	EX-19SB(-PN)	EX-14B(-PN)							
Sensing range			150 mm 5.906 in		500 mm 19.685 in		1 m 3.281 ft	2 to 25 mm 0.079 to 0.984 in (Note 4) (Conv. point: 10 mm 0.394 in)	150 mm 5.906 in		500 mm 19.685 in			
Min. sensing object			ø0.5 mm ø0.002 in opaque object (Completely beam interrupted object) (Note 5)	ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Note 5)		ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Note 5)		ø0.1 mm ø0.004 in copper wire (Setting distance: 10 mm 0.394 in)	ø1 mm ø0.039 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 150 mm 5.906 in)		ø2 mm ø0.079 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 500 mm 19.685 in)			
Hysteresis								15 % or less of operation distance (Note 4)						
Repeatability (perpendicular to sensing axis)			0.05 mm 0.002 in or less					0.1 mm 0.004 in or less	0.05 mm 0.002 in or less					
Supply voltage			12 to 24 V DC ±10 %					Ripple P-P 10 % or less						
Current consumption			Emitter: 10 mA or less, Receiver: 10 mA or less					13 mA or less	25 mA or less					
Output			<NPN output type> NPN open-collector transistor <ul style="list-style-type: none"><li>Maximum sink current: 50 mA</li><li>Applied voltage: 30 V DC or less (between output and 0 V)</li><li>Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current)</li></ul>					<PNP output type> PNP open-collector transistor <ul style="list-style-type: none"><li>Maximum source current: 50 mA</li><li>Applied voltage: 30 V DC or less (between output and +V)</li><li>Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current)</li></ul>					NPN open-collector transistor <ul style="list-style-type: none"><li>Maximum sink current: 100 mA</li><li>Applied voltage: 30 V DC or less (between output and 0 V)</li><li>Residual voltage: 2 V or less (at 100 mA sink current) 1 V or less (at 16 mA sink current)</li></ul>	
			Utilization category			DC-12 or DC-13								
			Short-circuit protection			Incorporated								
Response time			0.5 ms or less											
Operation indicator			Orange LED (lights up when the output is ON)					Orange LED (lights up when the output is ON), located on the bifurcation						
Incident beam indicator								Red LED (lights up under light received condition), located on the receiver						
Stability indicator			Green LED (lights up under stable light received condition or stable dark condition)					Green LED (lights up under stable light received condition or stable dark condition), located on the receiver						
Environmental resistance	Pollution degree		3 (Industrial environment)											
	Protection		IP67 (IEC)											
	Ambient temperature		-25 to +55 °C -13 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F											
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH											
	Ambient illuminance		Incandescent light: 3,000 lx at the light-receiving face											
	EMC		EN 60947-5-2											
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure											
	Insulation resistance		20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure											
	Vibration resistance		10 to 500 Hz frequency, 3 mm 0.118 in amplitude in X, Y and Z directions for two hours each											
Shock resistance		500 m/s² acceleration (50 G approx.) in X, Y and Z directions for three times each												
Emitting element			Red LED (Peak emission wavelength: 650 nm 0.026 mil, modulated)					Red LED (Peak emission wavelength: 680 nm 0.027 mil, modulated)						
Material			Enclosure: Polyethylene terephthalate Lens: Polyallylate					Enclosure: Polyethylene terephthalate Lens: Polyallylate, Bifurcation: Polyallylate						
Cable (Note 6)			0.1 mm² 3-core (thru-beam type emitter: 2-core) cabtyre cable, 2 m 6.562 ft long					0.2 mm² 3-core cabtyre cable, 2 m 6.562 ft long (beyond bifurcation; from emitter / receiver to bifurcation: 0.5 m 1.640 ft long)						
Cable extension			Extension up to total 50 m 164 ft is possible with 0.3 mm², or more, cable (thru-beam type: emitter and receiver).					Extension up to total 100 m 328 ft is possible with 0.3 mm², or more, cable.						
Weight			Net weight (each emitter and receiver): 20 g approx., Gross weight: 50 g approx.					Net weight: 20 g approx. Gross weight: 40 g approx.	Net weight: 55 g approx., Gross weight: 80 g approx.					
Accessories			Mounting screws: 1 set					Mounting screws: 1 set	Mounting screws: 1 set, Adjusting screwdriver: 1 pc.					

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) Model Nos. having the suffix "-PN" are PNP output type.

3) Either Light-ON or Dark-ON can be selected by the operation mode switch.

4) The sensing range and the hysteresis of convergent reflective type sensor are specified for white non-glossy paper (50 × 50 mm **1.969 × 1.969 in**) as the object.

5) The min. sensing objects are specified in case the emitter / receiver sensing range is to set the maximum.


6) The flexible cable type (model Nos. having suffix "-R") has a 0.1 mm<sup>2</sup> 3-core (thru-beam type emitter: 2-core) flexible cabtyre cable, 2 m **6.562 ft** long.

## I/O CIRCUIT AND WIRING DIAGRAMS

EX-11□ EX-11S□ EX-13□ EX-13S□ EX-19□ EX-19S□ EX-14□

NPN output type


### I/O circuit diagram

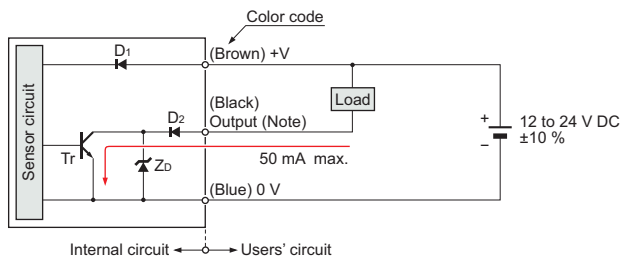

Note: The emitter of the thru-beam type sensor does not incorporate the output.

Symbols ... D1: Reverse supply polarity protection diode  
D2: Reverse output polarity protection diode  
ZD: Surge absorption zener diode  
Tr: NPN output transistor

### Wiring diagram

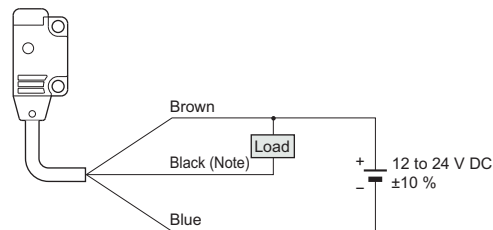


Note: The emitter of the thru-beam type sensor does not incorporate the black wire.

EX-11□-PN EX-11S□-PN EX-13□-PN EX-13S□-PN EX-19□-PN EX-19S□-PN EX-14□-PN

PNP output type


### I/O circuit diagram

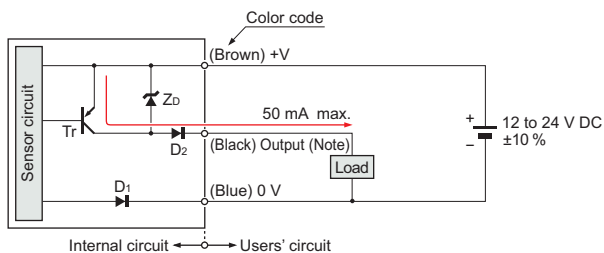

Note: The emitter of the thru-beam type sensor does not incorporate the output.

Symbols ... D1: Reverse supply polarity protection diode  
D2: Reverse output polarity protection diode  
ZD: Surge absorption zener diode  
Tr: PNP output transistor

### Wiring diagram

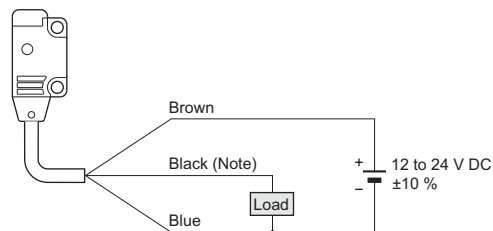


Note: The emitter of the thru-beam type sensor does not incorporate the black wire.

EX-15□ EX-15E□ EX-17□ EX-17E□


NPN output type

### I/O circuit diagram

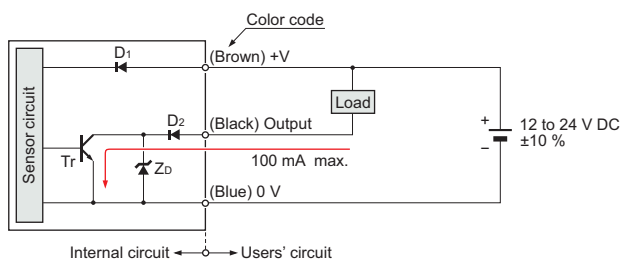

Symbols ... D1: Reverse supply polarity protection diode  
D2: Reverse output polarity protection diode  
ZD: Surge absorption zener diode  
Tr: NPN output transistor

### EX-15□, EX-15E□, EX-17□, EX-17E□ wiring diagram

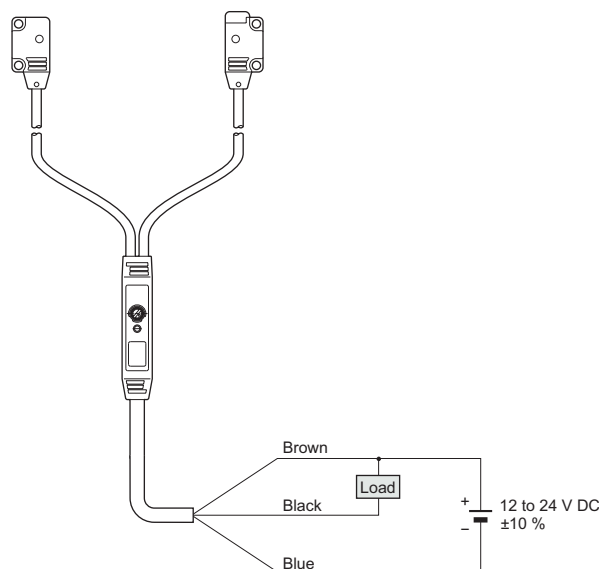

FIBER  
SENSORS

LASER  
SENSORS

PHOTO-  
ELECTRIC  
SENSORS

MICRO  
PHOTO-  
ELECTRIC  
SENSORS

AREA  
SENSORS

LIGHT  
CURTAINS /  
SAFETY  
COMPONENTS

PRESSURE /  
FLOW  
SENSORS

INDUCTIVE  
PROXIMITY  
SENSORS

PARTICULAR  
USE  
SENSORS

SENSOR  
OPTIONS

SIMPLE  
WIRE-SAVING  
UNITS

WIRE-SAVING  
SYSTEMS

MEASURE-  
MENT  
SENSORS

STATIC  
ELECTRICITY  
PREVENTION  
DEVICES

LASER  
MARKERS

PLC

HUMAN  
MACHINE  
INTERFACES

ENERGY  
CONSUMPTION  
VISUALIZATION  
COMPONENTS

FA  
COMPONENTS

MACHINE  
VISION  
SYSTEMS

UV  
CURING  
SYSTEMS

Selection  
Guide

Amplifier  
Built-in

Power Supply  
Built-in

Amplifier-  
separated

CX-400

CY-100

EX-10

EX-20

EX-30

EX-40

CX-440

EQ-30

EQ-500

MQ-W

RX-LS200

RX

RT-610